


ATP SDRAM

DRAM Solutions

Intense Performance for Intense Workloads

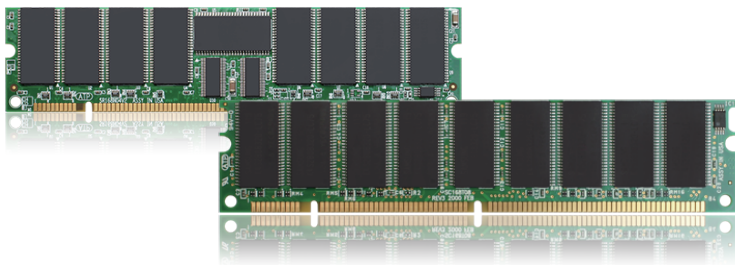

Synchronous Dynamic Random Access Memory (SDRAM) is the common term for PC100 and PC133 single data rate (SDR) SDRAM, with clock frequencies of 100/133 MHz.

ATP is committed to providing customers with the highest reliability products and offers custom screening services to help them meet specialized or unique application requirements.

Key Features

- Micron Continuity Program

Applications

- Networking systems
- Telecommunication
- Gaming
- Healthcare
- Industrial PCs



Specifications

SDRAM*	
Type	SODIMM
Data Rate Speed (MT/s)	PC 133 PC 100
Density	64 MB / 128 MB / 256 MB / 512 MB
Voltage	3.3V
PCB Height	▪ PCB Height: 1.125"/1.2"
Working Temperature	0-70°C
Golden Finger	30µ

* Available on a project basis.

ATP Global Footprint

To learn more about this product, contact your ATP Representative.

ATP TAIWAN(HQ)

TEL: +886-2-2659-6368
FAX: +886-2-2659-4982
sales-apac@atpinc.com

ATP USA

TEL: +1-408-732-5000
FAX: +1-408-732-5055
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0
FAX: +49-89-374-9999-29
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797
FAX: +81-3-6260-0798
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220
FAX: +86-21-9687-0000-026
sales@cn.atpinc.com