


# ATP DDR1 DRAM Solutions

## Intense Performance for Intense Workloads

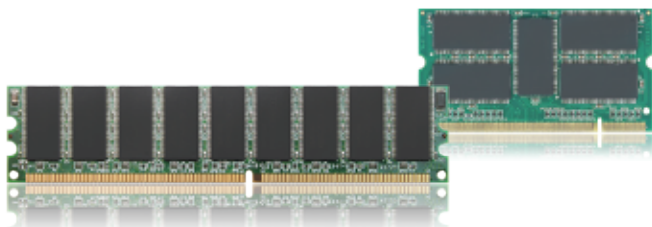

Double Data Rate (DDR), also known as DDR1, is the second generation of Synchronous DRAM (SDRAM). As its name implies, double data rate refers to its ability to read and write data on both the rising and falling of the system clock to achieve nearly twice the bandwidth of single data rate (SDR) SDRAM.


JEDEC developed the DDR SDRAM specification (JESD79) in 2000 and was an advancement over SDRAM technology with increased memory bandwidth and performance. ATP DDR1 modules have 266/333/400 MT/s transfer speeds and run at 2.5V, significantly cutting power consumption compared with SDRAM's 3.3V.

### Key Features

- Chipkill support
- Legacy system support

### Applications

- Networking systems
- Telecommunication
- Gaming
- Healthcare
- Industrial PCs



### Specifications

DDR*	
Category	UDIMM / UDIMM ECC / SO-DIMM
Speed (MT/s)	400 / 333 / 266
PCB Height	Low Profile

\* Available on a project basis.

Module Type	DDR			
	SO-DIMM	SO-DIMM (Industrial Grade)	UDIMM	SO-DIMM
Function	Unbuffered Non-ECC	Unbuffered Non-ECC	Unbuffered ECC / Unbuffered Non ECC	Unbuffered ECC
Frequency	400 MHz			
PCB Height	1.25"			
Capacity	128 MB / 256 MB / 512 MB / 1 GB	256 MB / 512 MB	256 MB / 512 MB	256 MB / 512 MB / 1 GB
Number of Pins	200	200	184	200
Solutions	Standard	Standard	Build To Order (BTO)	Build To Order (BTO)

### ATP Global Footprint

To learn more about this product, contact your ATP Representative.

#### ATP TAIWAN(HQ)

TEL: +886-2-2659-6368  
FAX: +886-2-2659-4982  
sales-apac@atpinc.com

#### ATP USA

TEL: +1-408-732-5000  
FAX: +1-408-732-5055  
sales@atpinc.com

#### ATP EUROPE

TEL: +49-89-374-9999-0  
FAX: +49-89-374-9999-29  
sales-europe@atpinc.com

#### ATP JAPAN

TEL: +81-3-6260-0797  
FAX: +81-3-6260-0798  
sales-japan@atpinc.com

#### ATP CHINA

TEL: +86-21-5080-2220  
FAX: +86-21-9687-0000-026  
sales@cn.atpinc.com