




microSD/microSDHC/microSDXC Card

The Global Leader in Specialized Storage and Memory Solutions

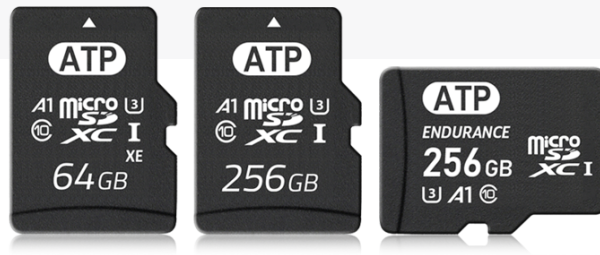

KEY FEATURES

- SD Life Monitor
- Dynamic Data Refresh
- Power failure protection
- Industrial temperature
- 100% MP Level Test

These tiny yet feature-rich and reliable removable storage solutions are used extensively in data logging, navigation and surveillance systems, in-vehicle infotainment (IVI), drive recorders, and other demanding applications.

To ensure data integrity, ATP microSD cards feature AutoRefresh read disturb protection and Dynamic Data Refresh data retention management technologies to prevent errors in frequently read and seldom-accessed areas. The Sudden Power-Off Recovery (SPOR) mechanism recovers valid data during voltage fluctuations or power loss events.

ATP microSD cards in 3D triple level cell (TLC) NAND flash come in capacities up to 512 GB. They feature 4KB page management and SLC caching algorithm, which allows 1/2 random access time and low latency compared with traditional solutions. These cards meet Android A1 application performance (SDA spec) and consume less power, making them suitable for small handheld devices with limited battery life.

Technologies & Add-On Services	S.M.A.R.T.	Firmware-based Power Loss Protection	AutoRefresh	Advanced Wear Leveling	Dynamic Data Refresh	Auto-Read Calibration	Secure Erase	Industrial Temperature	SiP	Complete Drive Test	Joint Validation
Premium	▲	○	▲	○	▲	▲	○	○	○	○	▲
Superior	▲	○	▲	○	▲	▲	○	○	○	○	▲

▲: Customization option available on a project basis.

Specifications

microSD/microSDHC/microSDXC Card						
Product Line	Premium					
	S800Pi	S750Pi	S750Pc	S700Pi	S700Pc	S700Pi / Pc
Interface	512 MB to 2 GB, HS mode 4 GB to 8 GB, UHS-I		UHS-I			
Flash Type	SLC	3D TLC (pSLC mode)		3D TLC (pSLC mode)		2D MLC (pSLC mode)
Form Factor	microSD Card					
Operating Temperature	-40°C to 85°C		-25°C to 85°C	-40°C to 85°C	-25°C to 85°C	-40°C to 85°C / -25°C to 85°C
Power Loss Protection Options	Firmware Based					
Optional SED Features	-					
Capacity	512 MB to 8 GB	16 GB to 128 GB		8 GB to 64 GB		4 GB to 8 GB
Performance						
Sequential Read (MB/s) up to	68	97		96		97
Sequential Write (MB/s) up to	39	82		76		82
Endurance and Reliability						
Endurance (TBW) ¹ up to	192 TB	12,670 TB		1,164 TB		240 TB
Reliability MTBF @ 25°C	>5,000,000 hours	>3,000,000 hours		>3,000,000 hours		>2,000,000 hours
Reliability Number of Insertions	20,000 (SDA spec minimum 10,000)					
Others						
Dimensions (mm)	15.0 x 11.0 x 1.0					
Certifications	CE, FCC, UKCA, RoHS					
Warranty	5 years					

microSD/microSDHC/microSDXC Card						
Product Line	Superior					
	S650Si	S650Sc	S600Si	S600Sc	S600Sc	S600Si / Sc
Interface	UHS-I					
Flash Type	3D TLC				MLC	2D MLC
Form Factor	microSD Card					
Operating Temperature	-40°C to 85°C	-25°C to 85°C	-40°C to 85°C	-25°C to 85°C		-40°C to 85°C / -25°C to 85°C
Power Loss Protection Options	Firmware Based					
Optional SED Features	-					
Capacity	64 GB to 512 GB		32 GB to 256 GB		8 GB to 32 GB	8 GB to 16 GB
Performance						
Sequential Read (MB/s) up to	97		97		68	97
Sequential Write (MB/s) up to	76		62		24	37
Endurance and Reliability						
Endurance (TBW) ¹ up to	2,000 TB		153 TB		38 TB	48 TB
Reliability MTBF @ 25°C	>2,000,000 hours					
Reliability Number of Insertions	20,000 (SDA spec minimum 10,000)					
Others						
Dimensions (mm)	15.0 x 11.0 x 1.0					
Certifications	CE, FCC, UKCA, RoHS					
Warranty	2 years					

¹ Under highest Sequential write value. May vary by density, configuration and applications.

Product spec and its related information are subject to change without advance notice.
Please refer to www.atpinc.com for latest information

v2 082024

© Copyright 2024 ATP Electronics, Inc. All rights reserved.



The Global Leader in Specialized Storage and Memory Solutions

WE BUILD WITH YOU

ATP TAIWAN (HQ)

TEL: +886-2-2659-6368
sales-apac@atpinc.com

ATP USA

TEL: +1-408-732-5000
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220
sales@cn.atpinc.com