




PCIe® Gen 4 NVMe M.2 2280 SSD

The Global Leader in Specialized Storage and Memory Solutions

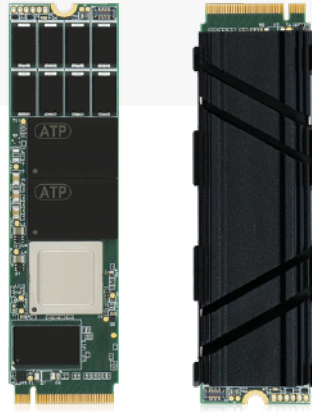

KEY FEATURES

- Endurance: 1 DWPD (5 years Enterprise workload)
- Sustained Write Performance: Up to 3,000 MB/s
- Data Retention: Up to 10 years at 55°C (pSLC)*
- Power Loss Protection: MCU-based* with data-at-rest and in-flight protection
- PLP Diag* (Self-Diagnosing Capacitor Check)
- Security: Self-Encrypting Drive (SED) with AES 256-bit Encryption, TCG Opal 2.0*
- Hardware Secure Erase / Write Protect*
- End-to-End Data Path Protection

* May vary by product and project support

**Customization available on a project basis

ATP NVMe™ M.2 2280 SSDs with the PCI Express® (PCIe®) Gen 4 x4 interface meet the growing need for high-speed data transfer in today's demanding applications.

Up to 4 TB capacity, support for I-Temp (-40°C to 85°C: N651Si) or C-Temp (0°C to 70°C: N601Sc) operation, plus AES 256-bit encryption and TCG Opal 2.0 security make these SSDs ideal for read/write-intensive mission-critical applications, such as data logging, surveillance, and imaging systems.

With twice the bandwidth of the previous generation (8 GT/s), PCIe Gen 4's 16 GT/s data rate translates to a bandwidth of 2 GB/s for every PCIe lane, enabling these SSDs to transfer data faster. ATP's PCIe Gen 4 SSDs use x4 lanes for a maximum bandwidth of 8 GB/s.

Thermal management options for optimal heat dissipation include a nickel-coated copper heat spreader on controller and a 4 mm or 8 mm fin-type heatsink design.

Technologies		S.M.A.R.T./ Life Monitor	PLP Diag	Industrial Temperature	Firmware-Based Power Loss Protection	Hardware-Based Power Loss Protection	Advanced Wear Leveling	AutoRefresh	Dynamic Data Refresh	Auto-Read Calibration	ETEDP	SED	Software Secure Erase	Hardware Secure Erase	Hardware Write Protect
Premium	N751Pi	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Superior	N651Si / N651Sc	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Superior	N601Si / N601Sc	○		○	○	▲	○	○	○		○	▲	▲	▲	▲
Value	N601Vi / N601Vc	○		○	○		○	○	○		○		○		
Momentum	N601Mw	○		▲	○		○	○	○	○	○		○		

▲: Customization option available on a project basis.

Specifications

Product Line	Superior			Value	Momentum
	N751Pi ¹	N651Si / N651Sc	N601Sc ²	N601Vi / N601Vc	N601Mw
Interface	PCIe G4 x4				
Flash Type	3D TLC (pSLC mode)	3D TLC			
Form Factor	M.2 2280-D6-M / M.2 2280-D2-M	M.2 2280-D6-M / M.2 2280-D5-M / M.2 2280-D2-M	M.2 2280 M-Key	M.2 2280-S3-M	M.2 2280 S3-M
Operating Temperature	-40°C to 85°C	-40°C to 85°C / 0°C to 70°C	0°C to 70°C	-40°C to 85°C / 0°C to 70°C	-20°C to 75°C
Power Loss Protection Options	Hardware + Firmware Based / Firmware Based ³	Hardware + Firmware Based / Firmware Based ³	Hardware + Firmware Based / Firmware Based	Firmware Based	
Optional SED Features	AES 256-bit Encryption, TCG Opal 2.0				-
Capacity	80 GB to 1.28 TB	240 GB to 7.68 TB ⁴	480 GB to 3.84 TB	240 GB to 1.92 TB	1 TB to 4 TB
Performance					
Sequential Read (MB/s) up to	6,450		7,000	5,000	7,200
Sequential Write (MB/s) up to	6,050		6,000	4,300	6,500
Random Reads IOPS up to	1,090,000	1,091,000	900,000	800,000	1,000,000
Random Writes IOPS up to	1,107,000	1,245,000	950,000	1,100,000	1,200,000
Endurance and Reliability					
Endurance (TBW) ³ up to	120,000 TB	40,000 TB	5,760 TB	4,170 TB	6,000 TB
Reliability MTBF @ 25°C	>3,000,000 hours			>3,000,000 hours	>3,000,000 hours
Others					
Dimensions (mm)	80 × 22 × 3.85 80 × 22 × 3.6 Optional 8 mm heatsink	80 × 22 × 3.85 80 × 22 × 3.9 80 × 22 × 3.6 Optional 8 mm heatsink	80.0 x 22.0 x 3.6	80.0 x 22.0 x 2.4	80.0 x 22.0 x 2.2
Certifications	CE, FCC, BSMI, UKCA, RoHS, REACH	CE, FCC, BSMI, UKCA, RoHS, REACH, UL			CE, FCC, BSMI, UKCA, RoHS, REACH
Warranty	5 years	3 years			2 years

Product Line	Superior	
	N601Sc ²	N601Si ²
Interface	PCIe G4 x4	
Flash Type	3D TLC	
Form Factor	M.2 2242 M-Key	M.2 2230 M-Key
Operating Temperature	0°C to 70°C	-40°C to 85°C
Power Loss Protection Options	Hardware + Firmware Based / Firmware Based	Firmware Based
Optional SED Features	AES 256-bit Encryption, TCG Opal 2.0	
Capacity	480 GB to 1.92 TB	240 GB to 960 GB
Performance		
Sequential Read (MB/s) up to	7,000	3,500
Sequential Write (MB/s) up to	6,000	3,400
Random Reads IOPS up to	900,000	600,000
Random Writes IOPS up to	950,000	750,000
Endurance and Reliability		
Endurance (TBW) ³ up to	2,880 TB	1,440 TB
Reliability MTBF @ 25°C	>3,000,000 hours	
Others		
Dimensions (mm)	42.0 x 22.0 x 3.6	30.0 x 22.0 x 3.6
Certifications	CE, FCC, BSMI, UKCA, RoHS, REACH, UL	
Warranty	3 years	

- 150K P/E cycle configuration drive available on a project basis
- Product specifications may be subject to change
- M.2 2280-D6-M (max height: 3.85mm) offers hardware-based power loss protection, while M.2 2280-D5-M (max height: 3.9mm) and M.2 2280-D2-M (max height: 3.6mm) provide firmware-based power loss protection.
- The 7,680 GB capacity is rated for commercial temperature operation only (0°C to 70°C)
- Under highest Sequential write value. May vary by density, configuration and applications.

Hot Items Ordering Information					
Product Line	Capacity ₁	Operating Temperature ₂	Power Loss Protection ₃	SED ₄	P/N
N651Si	240GB	-40°C to 85°C	Hardware + Firmware Based	-	FT240GP48APHBPI
N651Si	480GB	-40°C to 85°C	Hardware + Firmware Based	-	FT480GP48APHBPI
N651Si	960GB	-40°C to 85°C	Hardware + Firmware Based	-	FT960GP48APHBPI
N651Si	1920GB	-40°C to 85°C	Hardware + Firmware Based	-	FT1T92P48APHBPI
N651Si	240GB	-40°C to 85°C	Hardware + Firmware Based	✓	FT240GP48APHBSI
N651Si	480GB	-40°C to 85°C	Hardware + Firmware Based	✓	FT480GP48APHBSI
N651Si	960GB	-40°C to 85°C	Hardware + Firmware Based	✓	FT960GP48APHBSI
N651Si	1920GB	-40°C to 85°C	Hardware + Firmware Based	✓	FT1T92P48APHBSI

Hot Items Ordering Information					
Product Line	Capacity ₁	Operating Temperature ₂	Power Loss Protection ₃	SED ₄	P/N
N651Sc	240GB	0°C to 70°C	Hardware + Firmware Based	-	FT240GP48APHBPC
N651Sc	480GB	0°C to 70°C	Hardware + Firmware Based	-	FT480GP48APHBPC
N651Sc	960GB	0°C to 70°C	Hardware + Firmware Based	-	FT960GP48APHBPC
N651Sc	1920GB	0°C to 70°C	Hardware + Firmware Based	-	FT1T92P48APHBPC
N651Sc	240GB	0°C to 70°C	Hardware + Firmware Based	√	FT240GP48APHBSC
N651Sc	480GB	0°C to 70°C	Hardware + Firmware Based	√	FT480GP48APHBSC
N651Sc	960GB	0°C to 70°C	Hardware + Firmware Based	√	FT960GP48APHBSC
N651Sc	1920GB	0°C to 70°C	Hardware + Firmware Based	√	FT1T92P48APHBSC
N651Si	240GB	-40°C to 85°C	Firmware Based	-	FT240GP48APHBFI
N651Si	480GB	-40°C to 85°C	Firmware Based	-	FT480GP48APHBFI
N651Si	960GB	-40°C to 85°C	Firmware Based	-	FT960GP48APHBFI
N651Si	1920GB	-40°C to 85°C	Firmware Based	-	FT1T92P48APHBFI
N651Si	3840GB	-40°C to 85°C	Firmware Based	-	FT3T84P48APHBFI
N651Si	240GB	-40°C to 85°C	Firmware Based	√	FT240GP48APHBYI
N651Si	480GB	-40°C to 85°C	Firmware Based	√	FT480GP48APHBYI
N651Si	960GB	-40°C to 85°C	Firmware Based	√	FT960GP48APHBYI
N651Si	1920GB	-40°C to 85°C	Firmware Based	√	FT1T92P48APHBYI
N651Si	3840GB	-40°C to 85°C	Firmware Based	√	FT3T84P48APHBYI
N651Sc	240GB	0°C to 70°C	Firmware Based	-	FT240GP48APHBFC
N651Sc	480GB	0°C to 70°C	Firmware Based	-	FT480GP48APHBFC
N651Sc	960GB	0°C to 70°C	Firmware Based	-	FT960GP48APHBFC
N651Sc	1920GB	0°C to 70°C	Firmware Based	-	FT1T92P48APHBFC
N651Sc	3840GB	0°C to 70°C	Firmware Based	-	FT3T84P48APHBFC
N651Sc	240GB	0°C to 70°C	Firmware Based	√	FT240GP48APHBYC
N651Sc	480GB	0°C to 70°C	Firmware Based	√	FT480GP48APHBYC
N651Sc	960GB	0°C to 70°C	Firmware Based	√	FT960GP48APHBYC
N651Sc	1920GB	0°C to 70°C	Firmware Based	√	FT1T92P48APHBYC
N651Sc	3840GB	0°C to 70°C	Firmware Based	√	FT3T84P48APHBYC
N601Sc	240GB	0°C to 70°C	Firmware Based	-	AF240GSTJA-HBAXX
N601Sc	480GB	0°C to 70°C	Firmware Based	-	AF480GSTJA-HBAXX
N601Sc	960GB	0°C to 70°C	Firmware Based	-	AF960GSTJA-HBAXX
N601Sc	1920GB	0°C to 70°C	Firmware Based	-	AF1T92STJA-HBAXX
N601Sc	240GB	0°C to 70°C	Firmware Based	√	AF240GSTJA-HBBXX
N601Sc	480GB	0°C to 70°C	Firmware Based	√	AF480GSTJA-HBBXX
N601Sc	960GB	0°C to 70°C	Firmware Based	√	AF960GSTJA-HBBXX
N601Sc	1920GB	0°C to 70°C	Firmware Based	√	AF1T92STJA-HBBXX

1 Amount of actual usable storage that can be utilized.

2 Refers to Case Temperature range during device operation, as indicated by SMART temperature attributes.

3 Hardware + Firmware-based power loss protection design with Level 4 (data-in-flight) protection; Firmware-based power loss protection design with Level 1 (data-at-rest) protection.

4 Allows data written to and read from the SSD to be constantly and automatically encrypted and decrypted. Conforms to TCG Opal 2.0 and uses AES 256-bit HW encryption.



The Global Leader in Specialized Storage and Memory Solutions

WE BUILD WITH YOU

Product spec and its related information are subject to change without advance notice.

Please refer to www.atpinc.com for latest information

v2 062025

© Copyright 2025 ATP Electronics, Inc. All rights reserved.

ATP TAIWAN (HQ)

TEL: +886-2-2659-6368
sales-apac@atpinc.com

ATP USA

TEL: +1-408-732-5000
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220
sales@cn.atpinc.com

ATP INDIA

sales-india@atpinc.com