




The Global Leader in Specialized Storage and Memory Solutions

**WE BUILD WITH YOU**

# ATP INDUSTRIAL ENTERPRISE SSD SERIES

The Best of Both Worlds,  
Engineered for Uncontrolled Environments at the Edge

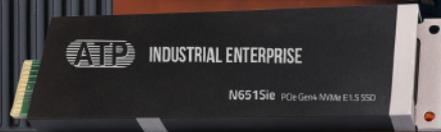

PRODUCT FLYER


# INTRODUCTION

Information Technology (IT) and Operational Technology (OT) are converging, resulting in the rise of Edge storage/computing that requires enterprise-class quality of service and industrial-grade reliability and endurance.

Enterprise storage/computing is becoming less centralized in data centers and controlled environments and becoming more distributed. Data is being driven to the edge where operating conditions are more extreme, locations are not easy to reach, and often, on the constant move. A new breed of storage solutions is needed, which combines the benefits of industrial solid-state drives (SSDs) and enterprise solutions.

The Industrial Enterprise N651S1e Series SSDs leverage NVMe PCIe Gen4x 4 and are available as M.2, U.2, and E1.S. They are built for the age of data deluge as centralized computing increasingly moves to the edge, and enterprise operations in uncontrolled environments become more prevalent.

They combine the best of enterprise and industrial features, making them excellent as boot drives, data storage drives, or mixed-use drives.

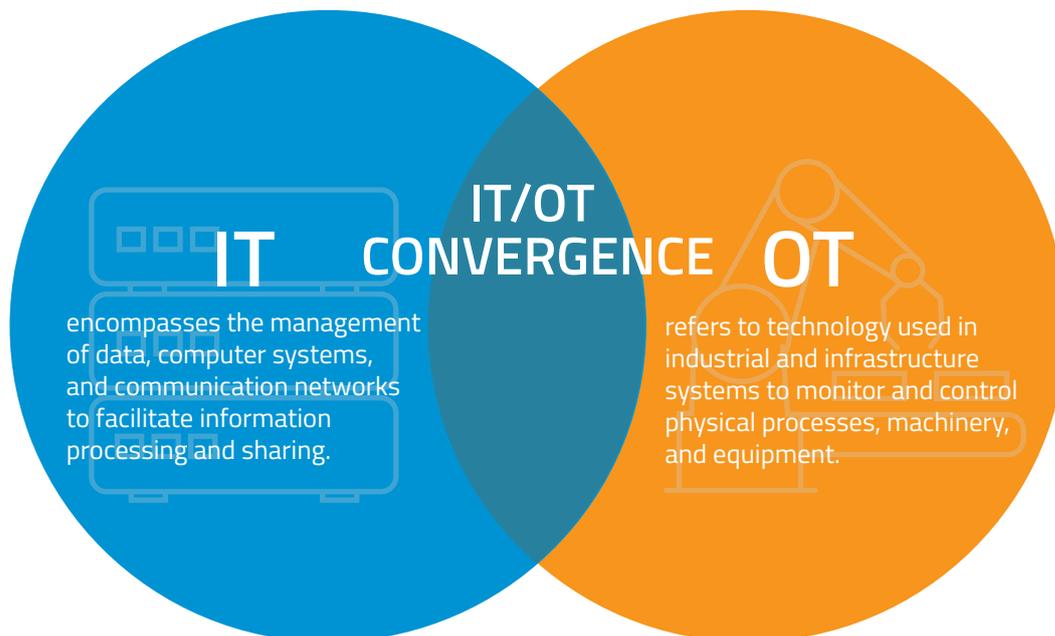

# The Best of Both Worlds

Why choose when you can have the Best of Both Worlds?



## BEST ENTERPRISE-CLASS FEATURES

### Endurance

- Boot: 1 DWPD
- Read Intensive: 2 DWPD ( By Project )
- Mixed Use/Write Intensive: 5 DWPD ( By Project )

### Data Retention

- 1 year at 55°C ( 100% P/E cycles )
- Exceeds JESD219A standards for Enterprise-Class SSDs

### Consistent Performance for Enterprise Workloads

- Sequential Read/Write:  
up to 6,450/6,100 MB/s
- High Sustained Sequential/Random Write:  
up to 1,100/390 MB/s

### High Quality of Service (QoS)

- M.2: Read <80µs, Write <30µs
- U.2 and E.1.5: Read <80µs, Write <30µs

### Reliability

- Very low uncorrectable bit error rate (UBER) of less than 1 in 10<sup>17</sup>
- Validated through End-of-Life testing and Reliability Demonstration Testing (RDT)

## BEST INDUSTRIAL-GRADE ADVANTAGES

### I-Temp Support

- Reliable operation from -40°C to 85°C

### Robust Cross-Temp Error Handling Solution

- Maintains data integrity under severe temperature changes
- Ensures reliability even towards the device's end of life

### Thermal Management

- Adaptive thermal throttling
- Customizable temperature settings
- Heatsink and graphite options for excellent heat dissipation

### Hardware Power Loss Protection (HW PLP)

- Protects stored data and data in transit
- Prevents data loss or corruption
- Essential for high-performance computing environments running 24/7

# WE BUILD WITH YOU Firmware Customization Service

Under ATP's WE BUILD WITH YOU program, the following enhanced Firmware Customization Services are available on a project-basis to meet various enterprise customer needs in Server, Storage and Compute.

## Power Loss Protection (PLP) Tuning

**Optimized Flush Cache Timing.** Ensures that the flush cache is completed within the capacitors' hold-up time to ensure the integrity of data in flight and at rest.

**PLP Capacitor Monitoring.** Performed using the on-board micro-controller unit (MCU), includes regular capacitor health checks during SSD boot-up and operation.

## Performance Behavior Tuning

Performance behavior analysis and customization to optimize throughput and latency in a customer host application

## Thermal Management Customization

ATP's thermal throttling solution is distinguished by the ability to adjust the temperature settings according to the customer's application-specific requirements.

## SMART ID Customization

The firmware includes a range of Self-Monitoring, Analysis and Reporting Technology (SMART) ID attributes which can be customized based on customer requirements.

## Download Microcode Capability

This service is part of flexible firmware maintenance, enabling Enterprise customers to rapidly make updates to their specific configurations via field updates, avoiding the hassle of sending SSDs back to ATP for reinitialization.

To ensure smooth DLMC (Download Microcode) operations during firmware verification or updates, especially when there are varying platform requirements during the validation process, ATP can provide multiple firmware binaries, allowing for testing flexibility.

This has resulted in strengthened DLMC Testing for Upload, Sideload, and Download. Building on the FW Field Update service, we perform DLMC testing between the new firmware version and its previous iterations. This includes ensuring successful self-updates for smoother transitions between different firmware versions or configurations during the customer's validation process.


## Enhanced Read Disturb Resilience

The FW algorithm ensures data integrity when data is frequently accessed by the host. ATP firmware will monitor the data and reprogram it to prevent data damage. This is especially important in read-only applications.

Frequent data reads are critical in read-only applications. ATP firmware is optimized to monitor and refresh data by implementing the "early move" (proactive approach) and "read reclaim" (reactive approach) algorithm. "Early move" refers to the moving of data to a different block when the error meets certain criteria of error threshold as defined by ATP. "Read reclaim" is activated by the frequency at which data is read to prevent data damage and ensure data integrity.

This feature validates Enhanced Read Disturb Resilience specifically for the Enterprise customer's script.

The firmware is modified to enhance its ability to withstand Read Disturb events. These modifications are intended exclusively for specific use cases identical to the Enterprise customer's, such as Boot-Up scenarios.

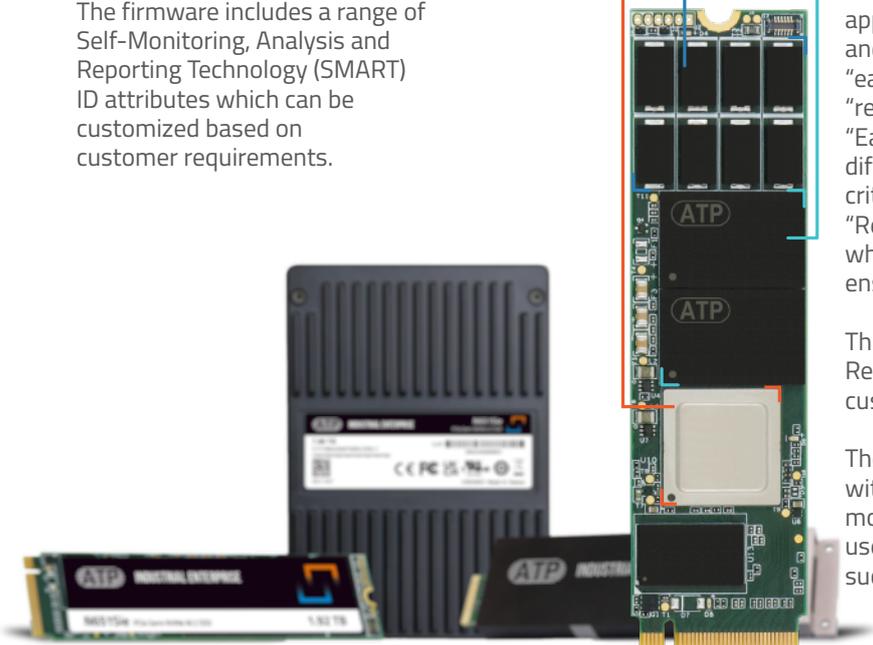

# Product Specification

| Product Line  | N651S1e   |                   |                      |
|---|---|-------------------|----------------------|
| Interface   | Gen4 x4   |                   |                      |
| Form Factor   | M.2   | U.2               | E1.S                 |
| Dimensions (mm)                                     | 80 x 22 x 3.85  | 100 x 69.85 x 15  | 118.75 x 33.75 x 9.5 |
| Flash Type  | TLC   |                   |                      |
| Capacity  | 240 GB to 1.92 TB   | 960 GB to 7.68 TB |                      |
| Sequential Read (up to) <sup>1,6,7</sup>            | 6,450 MB/s  | 6,000 MB/s        | 6,400 MB/s           |
| Sequential Write (up to) <sup>1,6,7</sup>           | 6,050 MB/s  | 6,000 MB/s        | 6,100 MB/s           |
| Random Read (up to) <sup>2,6,7</sup>                | 1,100 KIOPS   | 870 KIOPS         | 1,000 KIOPS          |
| Random Write (up to) <sup>2,6,7</sup>               | 1,250 KIOPS   | 1,230 KIOPS       | 1,200 KIOPS          |
| Sustained Sequential Write (up to) <sup>3,6,7</sup> | 820 MB/s  | 1,100 MB/s        |                      |
| Sustained Random Write (up to) <sup>4,6,7</sup>     | 100 KIOPS (390 MB/s)  |                   |                      |
| Endurance [DWPD] <sup>8,2</sup>                     | 1 DWPD ;<br>2 DWPD and 5 DWPD configurations available upon project support |                   |                      |
| QoS 99.9999% <sup>5,6,7</sup>                       | Read <80µs   Write <30µs  |                   |                      |
| Data Retention                                      | 1 year at 55°C (100% P/E cycles)  |                   |                      |
| Power Loss Protection                               | Yes   |                   |                      |
| End to End Data Path Protection                     | Yes   |                   |                      |
| Sustained Read Power (Max) <sup>7</sup>             | <9W   | <14.5W            | <13W                 |
| Sustained Write Power (Max) <sup>7</sup>            | <11.5W  | <17.5W            | <15.5W               |
| Supply Voltage                                      | 3.3V  | 12V               |                      |
| Operating Temperature Tc                            | -40°C to 85°C (I-Temp)  |                   |                      |
| Storage Temperature Tc                              | -40°C to 85°C   |                   |                      |
| Vibration   | Sine 16.4G, 10~2,000Hz  |                   |                      |
| Shock   | Half sine 1,500G/0.5ms  |                   |                      |
| MTBF @ 25°C   | > 3,000,000 hours   |                   |                      |
| UBER  | <1 sector per 10 <sup>^17</sup> bits read                                   |                   |                      |
| Warranty  | 5 years   |                   |                      |

Notes:

- Sequential Burst Performance tested with IOmeter 4MB, QD64
- Random Burst Performance tested with IOmeter 4KB, QD64
- Average Sustained Sequential Write Performance tested with IOmeter, 4MB, QD64 for 4 hours in dirty state ( 24-hour pre-conditioning under 4K random workload )
- Average Sustained Random Write Performance tested with IOmeter, 4KB, QD64 for 4 hours in dirty state ( 24-hour pre-conditioning under 4K random workload )
- 4KB Random QD=1
- Actual performance may vary depending on user conditions and system environment
- Parameters tested with highest capacity drive
- DWPD for 5 years tested with JESD219A Enterprise workload

| Featured SKUs             |                  |          |                              |                              |                              |
|---------------------------|------------------|----------|------------------------------|------------------------------|------------------------------|
| Target Usage              | Endurance rating | Capacity | PCIe® Gen4 NVMe M.2 SSD      | PCIe® Gen4 NVMe E1.S SSD     | PCIe® Gen4 NVMe U.2 SSD      |
| Boot                      | 1 DWPD           | 240 GB   | FT240GP48APHBSI-ERS          |                              |                              |
|                           |                  | 480 GB   | FT480GP48APHBSI-ERS          |                              |                              |
|                           |                  | 960 GB   | FT960GP48APHBSI-ERS          | FT960GES4APHBSI-ERS          | FT960GU24APHBSI-ERS          |
|                           |                  | 1.92 TB  | FT1T92P48APHBSI-ERS          | FT1T92ES4APHBSI-ERS          | FT1T92U24APHBSI-ERS          |
|                           |                  | 3.84 TB  |                              | FT3T84ES4APHBSI-ERS          | FT3T84U24APHBSI-ERS          |
|                           |                  | 7.68 TB  |                              | FT7T68ES4APHBSI-ERS          | FT7T68U24APHBSI-ERS          |
| Read Intensive            | 2 DWPD           | 200 GB   | Available on a project basis | Available on a project basis | Available on a project basis |
|                           |                  | 400 GB   |                              |                              |                              |
|                           |                  | 800 GB   |                              |                              |                              |
|                           |                  | 1.60 TB  |                              |                              |                              |
|                           |                  | 3.20 TB  |                              |                              |                              |
| 6.40 TB                   |                  |          |                              |                              |                              |
| Mixed Use/Write Intensive | 5 DWPD           | 120 GB   | Available on a project basis | Available on a project basis | Available on a project basis |
|                           |                  | 240 GB   |                              |                              |                              |
|                           |                  | 480 GB   |                              |                              |                              |
|                           |                  | 960 GB   |                              |                              |                              |
|                           |                  | 1.92 TB  |                              |                              |                              |
|                           |                  | 3.84 TB  |                              |                              |                              |



The Global Leader in Specialized Storage and Memory Solutions

# WE BUILD WITH YOU

Follow us on

ATP Website



in



You  
Tube



[www.atpinc.com](http://www.atpinc.com)

## ATP TAIWAN Headquarters

TEL: +886-2-2659-6368  
FAX: +886-2-2659-4982  
sales-apac@atpinc.com  
10F, No. 185, Tiding Blvd. Sec. 2,  
Neihu, Taipei, Taiwan 11493

## ATP USA

TEL: +1-408-732-5000  
FAX: +1-408-732-5055  
sales@atpinc.com  
2590 North First Street,  
Suite #150, San Jose, CA 95131, USA

## ATP INDIA

sales-india@atpinc.com

## ATP JAPAN

TEL: +81-3-6260-0797  
FAX: +81-3-6260-0798  
sales-japan@atpinc.com  
Daimon Urbanist 602, 2-3-6 Shiba Daimon,  
Minato-ku, Tokyo 105-0012, Japan

## ATP EUROPE

TEL: +49-89-374-9999-0  
FAX: +49-89-374-9999-29  
sales-europe@atpinc.com  
Max-Planck-Str. 5,  
D-85716 Unterschleißheim, Germany

## ATP CHINA

TEL: +86-21-5080-2220  
FAX: +86-21-9687-0000-026  
sales@cn.atpinc.com  
2F, Building 15, No. 115, Lane 572,  
Bibo Road, Zhangjiang High-Tech Park  
Pudong, Shanghai, China 201203

v3 102025

© Copyright 2025 ATP Electronics, Inc. All rights reserved.

Specifications or details may change without notice.  
All trademarks and registered trademarks are the property of their respective owners.

Printed on fully recyclable paper.